





Stickman®

CREATES POSSIBILITIES

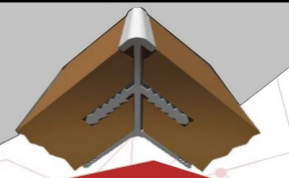

CONCEPT FOR DISPLAYING FEATURE PANELS

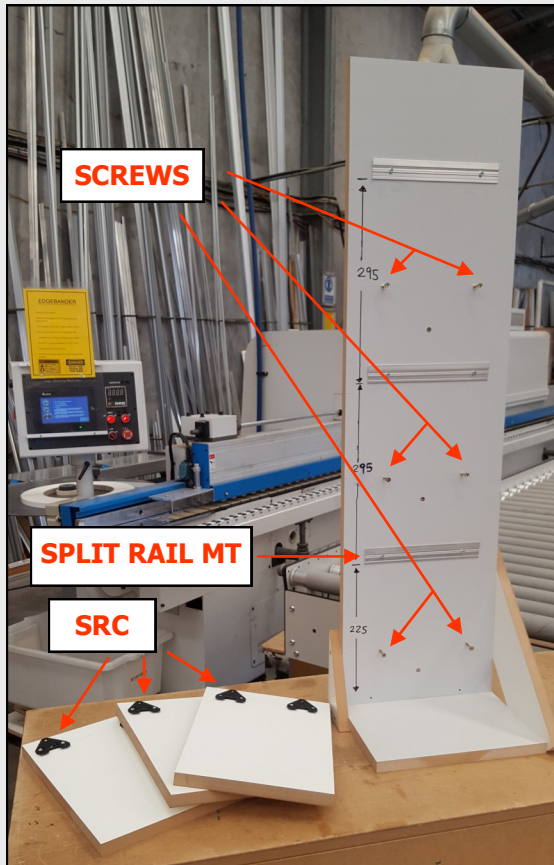

The pictures show a concept where the Stickman SPLIT RAIL (MT) and CLIP are used to display feature panels. The angle of the panel is set by positioning two screws (as in picture) or lengths of dowel at appropriate height to hold panels at angle. Alternatively a wooden strip can be used to hold panels out at an angle.

- Provides cost effective method to display *feature panels*.
- Use of cut lengths of dowel allow the supporting panels to be sent to site as a stack. On arrival the dowels fitted into predrilled holes
- Easy action to take the panel off the wall, show customer, and then reattach to wall
- No sharp edges on the SPLIT RAIL CLIP (SRC) to damage face of adjoining panel.
- The SRC is tough glass filled nylon.
- As *new colours* are introduced, just attach SRC to back of *new panel* and send to branches. Easy to pack and dispatch.

